

ChemTite™

PFA Lined for Severe Duty

**BALL
CHECK
VALVES**



FEATURES

- Size Range: 1" to 6"
- Pressure Rating: Full Vacuum to 275psig (19 bar)
- Operating Temperature: (-)20°F to (+)400°F
- Dovetail Locking Grooves for PFA retention
- Heavy Duty PFA Liner resists cracking
- Eliminates & Prevents
 - Back-Flow of liquids in pipelines
 - Pump impeller rotation in opposite direction
 - Siphoning of pumps
- Resistant To:
 - all acids
 - all solvents
 - all bleach solutions
 - all phenols
 - all caustics
 - all peroxides
 - all organic and inorganic chlorides & sulfates

THE ORIGINAL IN THE USA

Since 1931, Hills-McCanna® has earned a reputation for innovative products that serve demanding applications better than before. Today the Hills-McCanna legacy continues with the ChemTite™ series. ChemTite products are built with American quality for peace of mind and dependability in tough chemical applications.



Made in the USA




Phone: (616)554-3900
Fax: (616)554-9308

Hills-McCanna®
an ANDRONACO INDUSTRIES company

ChemTite™ BALL CHECK VALVES



PFA Lined for Severe Duty

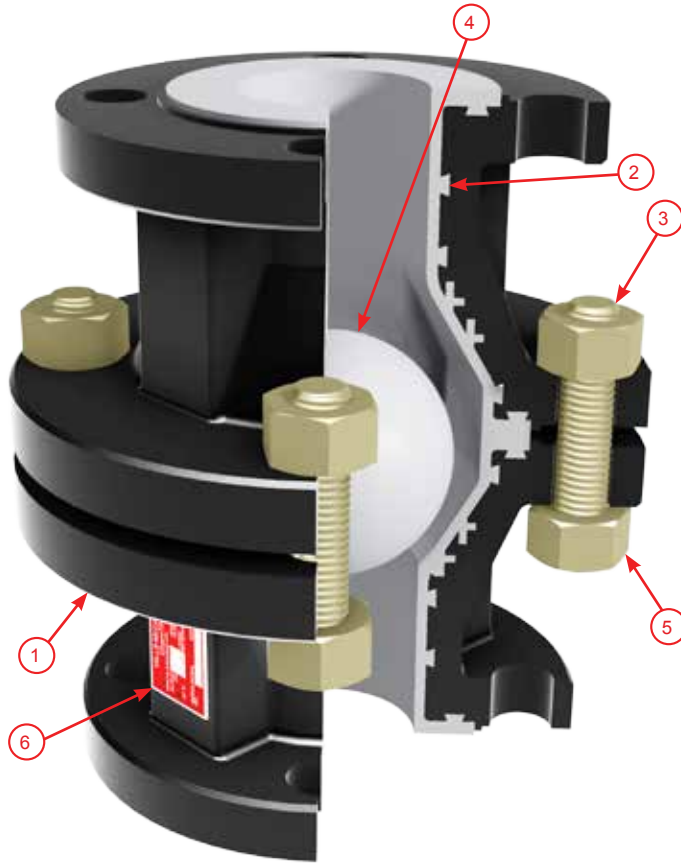

Sizes			
SIZE	(A) LENGTH	(B) DIAMETER	(C) FLARE DIAMETER
1"	6"	5½"	2"
1½"	7"	6½"	2½"
2"	8"	7-5/16"	3½"
3"	9½"	9-7/8"	5½"
4"	11½"	11¼"	6 - 5/16"
6"	14"	15½"	8"

Parts List			
ITEM	QTY	DESCRIPTION	MATERIAL
1	2	CHECK VALVE BODY	ASTM A395 DCI
2	1	LINER	PFA
3	4-8	THREADED STUD, GRADE B7	ZINC PLATED STEEL
4	1	CHECK VALVE BALL	VIRGIN PTFE
5	8-16	HEAVY HEX NUT, GRADE 2H	ZINC PLATED STEEL
6	1	NAME PLATE	304 STAINLESS STEEL

Not recommended for horizontal applications

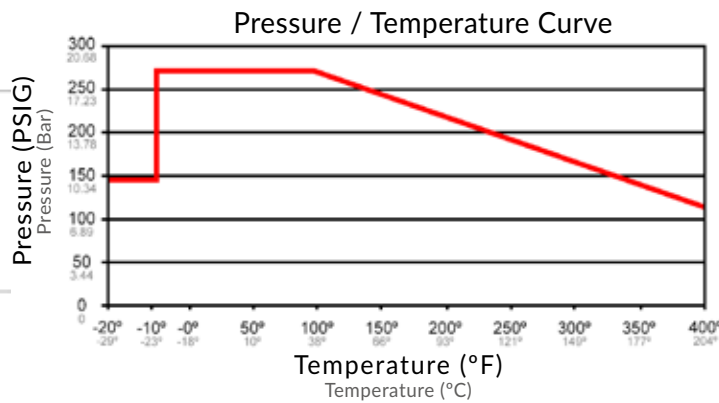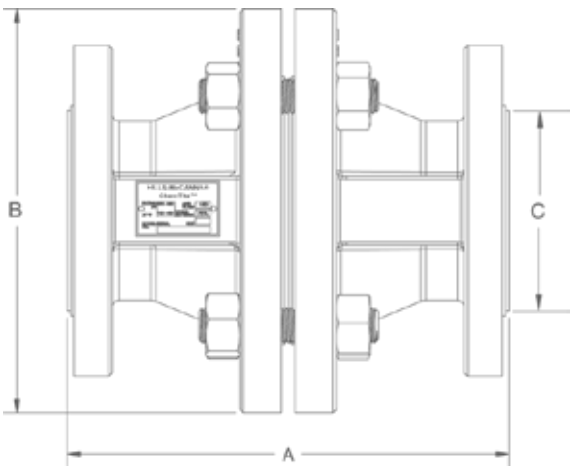

4855 Broadmoor Ave
Kentwood, Michigan 49512
www.hills-mccanna.com



Phone: (616)554-3900
Fax: (616)554-9308

Hills-McCanna
an ANDRONACO INDUSTRIES company

ChemTite BALL CHECK VALVES